CROWN DUO R13

ITEM DESCRIPTION

With Crown DUO R13 we enable cost-effective illumination of medium depth double-sided light boxes. Significantly improved cooling, Special acrylic elliptical lens grants wide angle uniform light distribution pattern.

APPLICATION

- High brightness illumination of medium depth double-sided light boxes
- Recommended depth 120 – 180 mm

FEATURES & BENEFITS

- High efficiency over 91 lm/W
- Special acrylic elliptical lens
- IP66 protection class
- 3 year warranty

GENERAL SPECIFICATIONS

INPUT CURRENT	350 mA
POWER	1.2 W
CCT	7000 K
RECOMMENDED DEPTH	From 120 to 180 mm
CC DISTANCE	205 mm
OPERATING TEMPERATURE	-35 °C ~ +50 °C
STORAGE TEMPERATURE	-40 °C ~ +90 °C
STORAGE CONDITIONS	Relative humidity <60%
LIFETIME	L70 45,000 h
WARRANTY	3 years*

*Warranty is applied only and if storage, mounting and maintenance conditions, stated in the installation guide, are followed.





* Dimensions are in mm

LIGHT DISTRIBUTION GRAPH

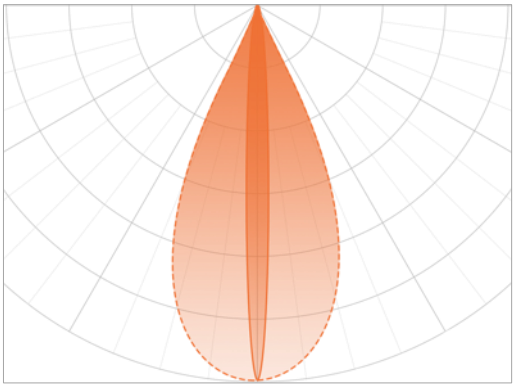

Beam angle: 45° x 15°

ORDERING INFORMATION

PRODUCT NAME	POWER, W	LUMEN OUTPUT, LM	COLOUR TEMP.	STATUS
BMS-R13-01UNELPW1	1.2	110	7000 K	IN STOCK

CHAIN	BAG	BOX
14 pcs (net weight: 0.196 kg)	56 pcs (net weight: 0.784 kg)	560 pcs (net weight: 7.840 kg)

© 2018, All rights reserved BaltLED, UAB. Specifications are subject to change without notice.