

CROWN DUO R21


With Crown DUO R21 we enable cost-effective illumination of big depth double-sided light boxes. Significantly improved cooling. Special acrylic elliptical lens grants wide angle uniform light distribution pattern.

Application

- High brightness illumination of big depth double-sided light boxes
- Recommended depth 160 – 200 mm

Features & benefits

- High efficiency over 85 lm/W
- Special acrylic elliptical lens
- IP66 protection class
- 3 year warranty




CROWN DUO R21 technical information

General specifications


Input current	700 mA
Power	2.4 W
CCT	6500 – 7000 K
Recommended depth	From 160 to 200 mm
CC distance	205 mm
Operating temp.	-35 °C ~ +50 °C
Storage temp.	-40 °C ~ +90 °C
Storage conditions	Relative humidity <60%
Certification	CE and RoHS compliant
IP class	IP66
Lifetime	L70 25,000 h
Warranty	3 years*

* Warranty is applied only and if storage, mounting and maintenance conditions, stated in the installation guide, are followed.

Dimensions

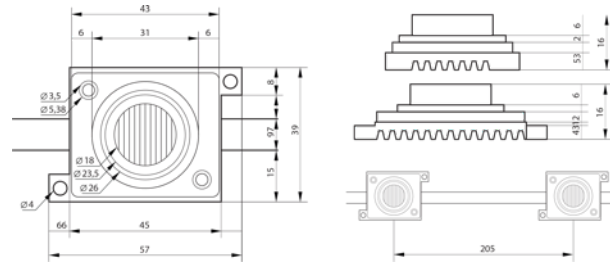

Light distribution graph

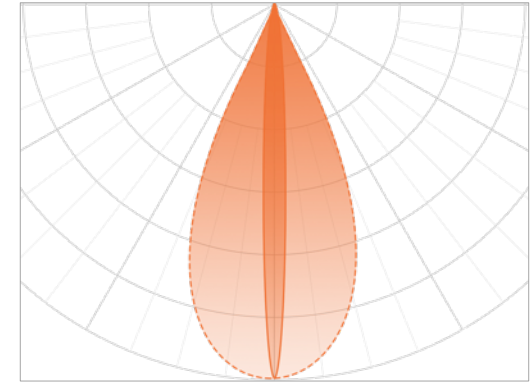

Beam angle: 15° x 45°

Ordering information

SKU	Luminous flux, lm	Colour temp.	Power, W
IN STOCK			
BMS-R21.2-01AUJLPW1	205	6500 – 7000 K	2.4

Ordering quantity

Chain: 14 pcs	(net weight: 0.406 kg)
Bag: 56 pcs	(net weight: 1.624 kg)
Box: 448 pcs	(net weight: 12.994 kg)