

BP3-C700-34.1


34 W CONSTANT CURRENT LED DRIVER

Features

- Constant current type power supply
- 100 – 240 VAC input
- IP67 protection class
- UL1310 Class 2 power unit, pass LPS
- 100% full load burn-in tested
- Designed for LED lighting and signage applications
- 3 years warranty

Conformity & Standards

- EN60950-1
- EN61347-2-13
- EN55022 Class B
- EN 61000-3-2,-3
- EN61000-4-2,3,4,5,6,8,11
- EN50204

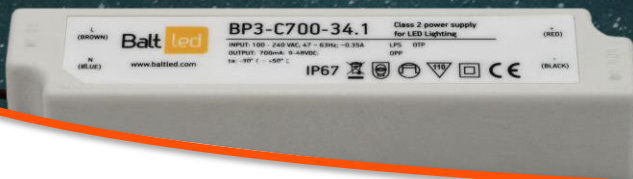

Technical information

General specifications

Efficiency	84%
Turn on delay	0.24 s
Operating conditions	-30 °C ~ +50 °C; 20 ~ 90% humidity
Storage conditions	-40 °C ~ +80 °C; 10 ~ 95% humidity
IP class	IP67
Protections included	Over power (overload) Over temperature
Warranty	3 years, 25 000 h

Quantity of drivers per circuit breaker

Circuit breaker of type B	Circuit breaker of type C
4 units (at 230 VAC)	7 units (at 230 VAC)

Input

Input voltage range	100 – 240 VAC; (47 – 63 Hz)
Max input AC current	0.35 A
Max inrush current	70 A
Power factor	0.65

Output

Max load	48 VDC
Output current	0.7 A ± 5%
Output voltage	9 – 48 VDC
Output power	33.5 W

Ordering information

SKU	Unit net weight, g	Unit dimensions, mm
BP3-C700-34.1	241.0	148 x 32 x 28

Dimensions

