

CROWN DUO H32.2


With Crown DUO H32.2 we enable cost-effective illumination of medium depth double-sided light boxes. Special acrylic elliptical lens grants wide angle uniform light distribution pattern. Aluminum case significantly improves cooling.

Application

- High brightness illumination of medium depth double-sided light boxes
- Recommended depth 120 – 200 mm

Features & benefits

- High efficiency over 107 lm/W
- Special acrylic elliptical lens
- IP66 protection class
- 5 year warranty

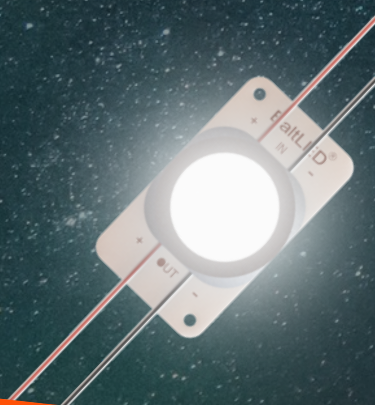


CROWN DUO H32.2 technical information

General specifications


Input current	350 mA
Power	1 W
CCT	6500 – 7000 K
Recommended depth	From 120 to 200 mm
CC distance	220 mm
Operating temp.	-35 °C ~ +50 °C
Storage temp.	-40 °C ~ +90 °C
Storage conditions	Relative humidity <60%
Certification	CE and RoHS compliant
IP class	IP66
Lifetime	L70 50,000 h
Warranty	5 years*

* Warranty is applied only and if storage, mounting and maintenance conditions, stated in the installation guide, are followed.

Dimensions

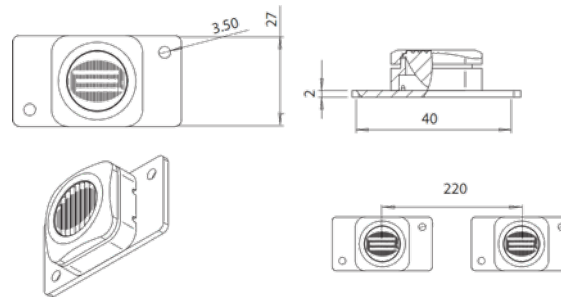

Light distribution graph

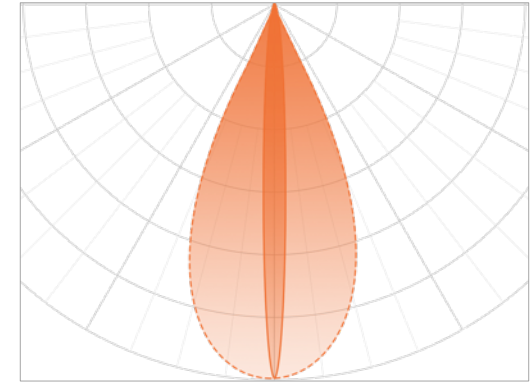

Beam angle: 38 ° x 12°

Ordering information

SKU	Luminous flux, lm	Colour temp.	Power, W
IN STOCK			
BMP-H32.2-O1UOELPW1	110	6500 – 7000 K	1

Ordering quantity

Chain: 15 pcs	(net weight: 0.435 kg)
Bag: 45 pcs	(net weight: 1.305 kg)
Box: 270 pcs	(net weight: 7.783 kg)