CROWN OPTO Q4

3 YEARS WARRANTY | IP66 | RoHS Compliant | CE | ☒ | F

GENERAL SPECIFICATIONS

SUPPLY VOLTAGE	12 VDC
POWER	2 W
CCT	7000 – 7400 K
RECOMMENDED DEPTH	From 200 to 300 mm
CC DISTANCE	350 mm
OPERATING TEMPERATURE	-35 °C ~ +50 °C
STORAGE TEMPERATURE	-40 °C ~ +90 °C
STORAGE CONDITIONS	Relative humidity <60%
LIFETIME	L70 25,000 h
WARRANTY	3 years *

*Warranty is applied only and if storage, mounting and maintenance conditions, stated in the installation guide, are followed.
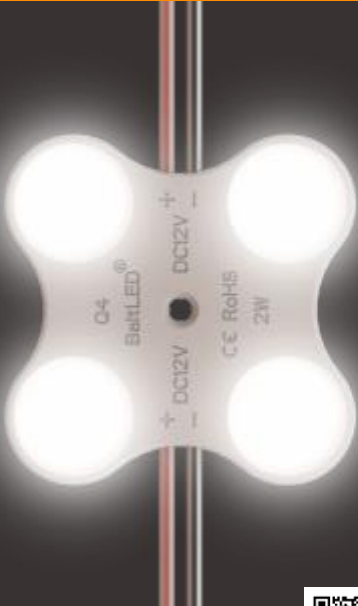
* Dimensions are in mm

ITEM DESCRIPTION

With Crown OPTO Q4 we enable fast and cost-effective illumination of letters medium to big depth and one sided light boxes. Designed for one point installation, they save up more than 40% of installation time in comparison with other same size modules. As these modules can be installed with 350 mm step, you need 20% less modules for 1 m^2 than with previous solutions.

APPLICATION

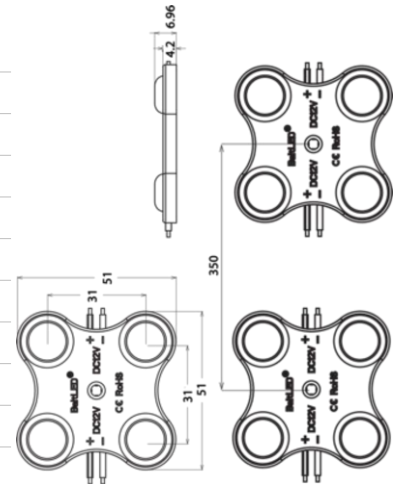- Big letters and one sided light boxes
- Recommended depth 200 – 300 mm

FEATURES & BENEFITS

- CRI > 85
- High efficiency up to 90 lm/W
- Easy and fast installation cables
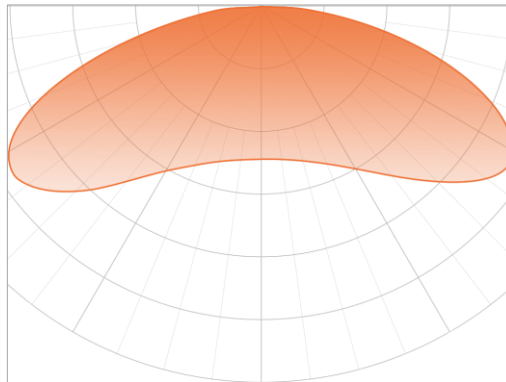- IP66 protection class
- 3 year warranty

LIGHT DISTRIBUTION GRAPH

Beam angle: 160°

ORDERING INFORMATION

PRODUCT NAME	POWER	LUMEN OUTPUT, LM	COLOUR TEMP.	STATUS
BMS-Q4.1-04UH160W1	2	180	7000 K	IN STOCK

CHAIN	BAG	BOX
20 pcs (net weight: 0.34 kg)	80 pcs (net weight: 1.36 kg)	480 pcs (net weight: 8.16 kg)