



TANAGER RETAIL LUMINAIRE

PRODUCT INFORMATION

With Tanager we are introducing a luminaire, that is flexible enough to cover all supermarket lighting tasks. Due to its smart construction, it allows to create efficient lighting for goods on the shelves and ambient lighting. Moreover, due to adjustable light source directions, with Tanager you can light up both shelves with goods and advertisements above the shelves simultaneously.

Tanager is also great option when you need different zone design. This retail luminaire has 3 types of light diffusers, brightness levels, therefore you can create distinct lighting based on zones. Moreover, you can adjust the colour of Tanager to merge with your shop design and promote sales even further.

APPLICATION

- Supermarket lighting
- Aisle lighting
- Shelf lighting
- Groceries lighting


FEATURES & BENEFITS

- Adjustable light source directions
- 3 types of light diffusers
- Easy mounting: surface, suspended, 3-phase track
- Operational height from 2.5 m to 6 m
- DALI control available
- Optional colours of the body
- 5 year warranty

TANAGER RETAIL LUMINAIRE

GENERAL INFORMATION

SUPPLY VOLTAGE	198 – 264 V; 50/60 Hz
POWER FACTOR	0.96 – 0.99
EFFICACY	108 – 130 Lm/W
CCT	4000 K ± 150 K (natural white) 3000 K ± 150 K (warm white)
CRI	>82
LIGHT SOURCE	3 types of LED diffusers, adjustable light source angle
IP CLASS	IP20
RECOMMENDED HEIGHT	from 2.5 to 6 meters
OPERATING TEMP.	-10 °C ~ +35 °C
STORAGE TEMP.	-5 °C ~ +50 °C
LIFETIME	L90B10 70 000 h (Ta +25 °C)
MOUNTING OPTIONS	surface, suspended, 3-phase track
CERTIFICATION	CE and RoHS compliant
UGR SHADES	optional
WARRANTY	5 years
OPTIONAL FEATURE	DALI

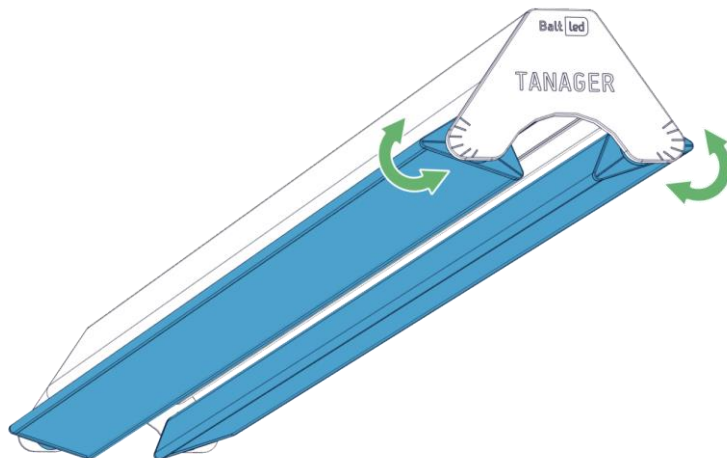

ORDERING INFORMATION

SKU	DIMENSIONS, MM	POWER, W	LUMEN OUTPUT, LM	CCT, K	LIGHT DIFUSSER TYPE			OPTIONAL FEATURE: DALI
					DIA	FRO	CRS	
BRLH-03830	310x138x145	20 ± 3%	up to 2600 ± 3%	3000 ± 150	+	+	+	-
BRLH-05830	560xHx145	42 ± 3%	up to 4765 ± 3%	3000 ± 150	+	+	+	+
BRLH-10830	1060xHx145	82 ± 3%	up to 9962 ± 3%	3000 ± 150	+	+	+	+
BRLH-15830	1560xHx145	117 ± 3%	up to 14646 ± 3%	3000 ± 150	+	+	+	+
BRLH-03840	310x138x145	20 ± 3%	up to 2442 ± 3%	4000 ± 150	+	+	+	-
BRLH-05840	560xHx145	42 ± 3%	up to 5460 ± 3%	4000 ± 150	+	+	+	+
BRLH-10840	1060xHx145	82 ± 3%	up to 10660 ± 3%	4000 ± 150	+	+	+	+
BRLH-15840	1560xHx145	117 ± 3%	up to 15210 ± 3%	4000 ± 150	+	+	+	+

H – depends on mounting solution: 3-phase track H=138; surface, suspended H= 81

DIA – Diamond light difusser

FRO – Frosted light difusser

CRS – Crosswise stripped light difusser