



# HERONLUX

## PRODUCT DESCRIPTION

HeronLux downlight luminaire – an ideal solution for your office lighting. Due to their versatility, HeronLux luminaires are also perfect to illuminate such spaces as corridors, shopping centres, exhibition halls and etc. Designed for recessed ceiling.

## APPLICATION

- Offices
- Hallways
- Shopping centres
- Technical rooms
- Common rooms
- Showrooms

## FEATURES & BENEFITS


- Available options from 525 lm up to 3472 lm
- IP20 protection class
- DALI control available
- 5 year warranty
- Easy installation

# HERONLUX

## GENERAL INFORMATION

SUPPLY VOLTAGE	198 – 264 V, 50-60 Hz
POWER FACTOR	0.90
EFFICACY	105 – 113 lm/W
CCT	4000 K ± 150 K (natural white)
CRI	>80
BEAM ANGLE	90°
IP CLASS	IP20
RECOMMENDED HEIGHT	from 2 to 6 meters
OPERATING TEMP.	-15 °C ~ +40 °C
STORAGE TEMP.	+5 °C ~ +50 °C
LIFETIME	L90B10 50 000 h (Ta +25 °C)
MOUNTING OPTIONS	recessed
CERTIFICATION	CE and RoHS compliant
WARRANTY	5 years
OPTIONAL FEATURES	DALI

## LIGHT DISTRIBUTION GRAPH

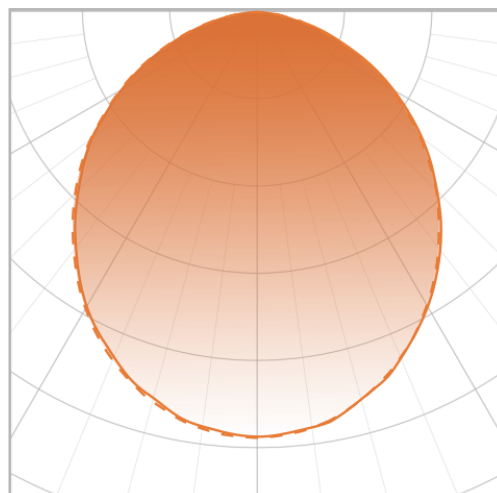

— C0-180    - - - C90-270

## ORDERING INFORMATION

SKU	POWER, W	LUMEN OUTPUT, LM	DIMENSIONS, MM	WEIGHT, KG	DALI FEATURE
BDNP-R3-A100840I05	5	525	Face/height: $\Phi$ 108*36 Cut hole: $\Phi$ 80	0.24	-
BDNP-R4-A100840I09	9	945	Face/height: $\Phi$ 138*39 Cut hole: $\Phi$ 115	0.39	-
BDNP-R5-A100840I12	12	1284	Face/height: $\Phi$ 178*44 Cut hole: $\Phi$ 155	0.49	-
BDNP-R6-A100840I20	20	2170	Face/height: $\Phi$ 190*45 Cut hole: $\Phi$ 160	0.67	-
BDNP-R8-A100840I31	31	3503	Face/height: $\Phi$ 242*56 Cut hole: $\Phi$ 210	0.96	-
BDNP-R6-A100840I20-DA	20	2160	Face/height: $\Phi$ 190*45 Cut hole: $\Phi$ 160	0.67	+
BDNP-R8-A100840I31-DA	31	3472	Face/height: $\Phi$ 242*56 Cut hole: $\Phi$ 210	0.96	+