




LED EMERGENCY MODULE

Emergency luminaires are designed to provide adequate lighting in the event of an emergency or power failure. It can provide 120 or 180 minutes of illumination for the rated wattage upon loss of AC power.

GENERAL INFORMATION

SUPPLY VOLTAGE	220-240V; 50Hz
EMERGENCY AUTONOMY	2/3 hours
IP CLASS	IP65
VISIBILITY	24 m
OPERATING TEMP.	+10°C ~ +50 °C
INSTALLATION OPTIONS	surface, recessed, suspended
CERTIFICATION	CE

MOUNTING OPTIONS

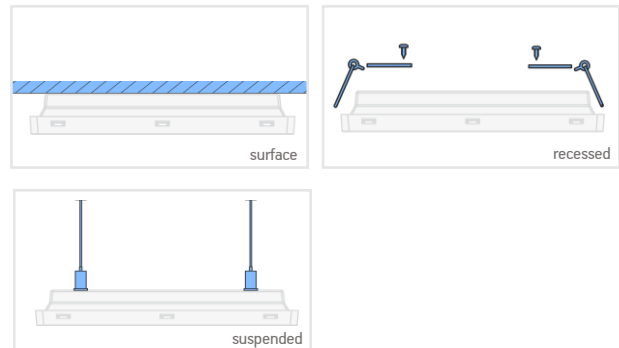

ORDERING INFORMATION

MODULE

SKU	OPTICS	EMERGENCY AUTONOMY	POWER CONSUMPTION, W (when charging)	LUMEN OUTPUT, LM	DIMENSIONS, MM
BEMP-3H450E2-SO	SO	3 h	2	450	269x144x42
BEMP-2H740E2-SO	SO	2 h	2	740	269x144x42
BEMP-3H190E2-SC	SC	3 h	2	190	269x144x42
BEMP-3H280E2-SC	SC	3 h	2	280	269x144x42
BEMP-3H480E2-SCH	SCH	3 h	2	480	269x144x42
BEMP-3H340E2-SCHA	SCHA	3 h	2	340	269x144x42
BEMP-2H460E2-SCHA	SCHA	2 h	2	460	269x144x42
BEMP-3H350E2-SOH	SOH	3 h	2	350	269x144x42
BEMP-3H530E2-SOH	SOH	3 h	2	530	269x144x42

Legend

SO – open spaces

SC – corridor lens type

SCH – corridor lens type for high spaces

SCHA – corridor lens type for high spaces, asymmetric

SOH – open spaces high

MOUNTING ACCESSORIES

SKU	DESCRIPTION
BEMP-RE-KIT	Recessed mounting kit for BEMP emergency modules
BEMP-SU-KIT	Suspended mounting kit for BEMP emergency modules

OTHER EMERGENCY LIGHTING OPTIONS

SURFACE MOUNTED EMERGENCY MODULE

FIXTURE

SUPPLY VOLTAGE	230V; 50Hz
EMERGENCY AUTONOMY	3 hours
POWER CONSUMPTION, W (when charging)	3
LUMEN OUTPUT, LM	154
IP CLASS	IP65
OPERATING TEMP.	+10°C ~ +55 °C
INSTALLATION OPTIONS	surface
CERTIFICATION	CE
DIMENSIONS, MM	352x118x64
SKU	BEMF-L10A120H3E3



BEMF-L10A120H3E3



BEMF-L10A120H3E3-SKIT

ACCESSORIES

SKU	DESCRIPTION
BEMF-L10A120H3E3-SKIT	Sticker kit FOR BEMF-L10A120H3E3, 9 different stickers
BEMF-L10A120H3E3-EXIT-KIT	Plexi glass frame for double sided applications
BEMF-L10-EXIT-S-KIT	Sticker for BEMF-L10A120H3E3-EXIT, 22 pcs (11 different directions)



BEMF-L10A120H3E3-EXIT-KIT



BEMF-L10-EXIT-S-KIT

SURFACE MOUNTED EXIT SIGN

FIXTURE

SUPPLY VOLTAGE	230V; 50Hz
EMERGENCY AUTONOMY	3 hours
POWER CONSUMPTION, W (when charging)	1
IP CLASS	IP20
OPERATING TEMP.	+10°C ~ +55°C
INSTALLATION OPTIONS	surface (standard), wall (optional)
CERTIFICATION	CE
DIMENSIONS, MM	335x255x35
SKU	BEMF-EXIT-LE1H311



BEMF-EXIT-LE1H311

ACCESSORIES

SKU	DESCRIPTION
BEMF-EXIT-LE1H311-W-KIT	Wall mounting kit for BEMF EXIT
BEMF-EXIT-LE1H311-S-KIT	Sticker for BEMF-EXIT-LE1H311, 22 stickers (11 different exit paths)



BEMF-L10A120H3E3-S-KIT



BEMF-L10A120H3E3-SKIT

OTHER EMERGENCY LIGHTING OPTIONS

SURFACE MOUNTED EMERGENCY DOWNLIGHT

FIXTURE

SUPPLY VOLTAGE	230V; 50Hz
EMERGENCY AUTONOMY	3 hours
POWER CONSUMPTION, W (when charging)	3
LUMEN OUTPUT, LM	175
TYPES OF LENS	S0 - open zones SC - corridor type
IP CLASS	IP41
OPERATING TEMP.	+10°C ~ +40 °C
INSTALLATION OPTIONS	surface
CERTIFICATION	CE
DIMENSIONS, MM	150x44
SKU	BEMF-LE1H313-S0-S BEMF-LE1H313-SC-S



BEMF-LE1H313-S0-S



BEMF-LE1H313-SC-S

RECESSED MOUNTED EMERGENCY DOWNLIGHT

FIXTURE

SUPPLY VOLTAGE	230V; 50Hz
EMERGENCY AUTONOMY	3 hours
POWER CONSUMPTION, W (when charging)	3
LUMEN OUTPUT, LM	216
TYPES OF LENS	S0 - open zones SC - corridor type
IP CLASS	IP20
OPERATING TEMP.	+10°C ~ +40 °C
INSTALLATION OPTIONS	recessed
CERTIFICATION	CE
DIMENSIONS, MM	103x53
SKU	BEMF-LE1H313-S0 BEMF-LE1H313-SC



BEMF-LE1H313-S0



BEMF-LE1H313-SC