


# LINELIT STRIP



## GENERAL SPECIFICATIONS

SUPPLY VOLTAGE	24 VDC
WATTS PER METER	5 W   10 W   15 W   20 W   25 W
CRI	80
LEDs PER METER	56   112
CUTTING STEP	125 mm   62.5 mm
STRIP WIDTH	8 mm
BINNING	3 SDCM
COLOUR / CCT	3000 K   4000 K
OPERATING TEMPERATURE	-20 °C ~ +60 °C
STORAGE TEMPERATURE	+5 °C ~ +70 °C
CERTIFICATION	CE and RoHS compliant
IP CLASS	IP 20
LIFETIME	L80 75,000 h
WARRANTY	5 years
MOUNTING OPTIONS	double-sided tape

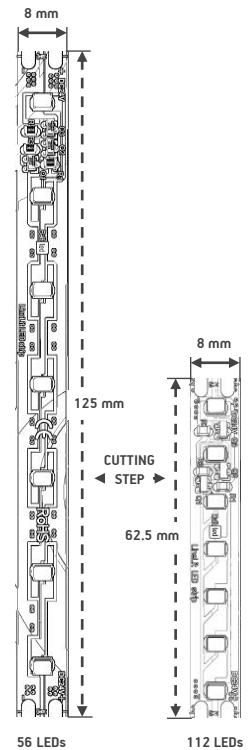

## ITEM DESCRIPTION

Flexible LED strips with 56 or 112 new generation LEDs reaching up to 160 lm/w efficacy. Comes with double-sided tape for easy peel and use; low temperature on metal profiles and popular power range from 5 to 25 watts per meter. Made from high-quality electronic components ensuring long lifetime up to 75 000 h (L80) with 5 years warranty.

Perfect for aluminium profiles, side lighting, signs, general lighting, office lighting.

## APPLICATION

- Aluminium profiles
- Side lighting
- Signs
- General lighting
- Office lighting

## FEATURES & BENEFITS

- Equipped with Osram GEN 2 LEDs
- 5-years warranty
- Durable thermal conductive double-sided adhesive tape
- Compact 8 mm width
- Low temperatures on metal profiles

## ORDERING INFORMATION

SKU	LEDs per METER	CUTTING STEP, MM	COLOUR	POWER per METER, W	LUMEN OUTPUT, LM	STATUS
BLSP-LE56830I5	56	125	3000 K	5.0	638	PRE-ORDER*
BLSP-LE56830I10	56	125	3000 K	10.0	1284	PRE-ORDER*
BLSP-LE56830I15	56	125	3000 K	15.0	1842	PRE-ORDER*
BLSP-LE56830I20	56	125	3000 K	20.0	2607	PRE-ORDER*
BLSP-LE56830I25	56	125	3000 K	25.0	3062	PRE-ORDER*
BLSP-LE56840I5	56	125	4000 K	5.0	717	PRE-ORDER*
BLSP-LE56840I10	56	125	4000 K	10.0	1443	PRE-ORDER*
BLSP-LE56840I15	56	125	4000 K	15.0	2070	PRE-ORDER*
BLSP-LE56840I20	56	125	4000 K	20.0	2929	PRE-ORDER*
BLSP-LE56840I25	56	125	4000 K	25.0	3440	PRE-ORDER*
BLSP-LE112830I5	112	62.5	3000 K	5.0	712	PRE-ORDER*
BLSP-LE112830I10	112	62.5	3000 K	10.0	1348	PRE-ORDER*
BLSP-LE112830I15	112	62.5	3000 K	15.0	2027	PRE-ORDER*
BLSP-LE112830I20	112	62.5	3000 K	20.0	2623	PRE-ORDER*
BLSP-LE112830I25	112	62.5	3000 K	25.0	3200	PRE-ORDER*
BLSP-LE112840I5	112	62.5	4000 K	5.0	800	PRE-ORDER*
BLSP-LE112840I10	112	62.5	4000 K	10.0	1515	PRE-ORDER*
BLSP-LE112840I15	112	62.5	4000 K	15.0	2278	PRE-ORDER*
BLSP-LE112840I20	112	62.5	4000 K	20.0	2948	PRE-ORDER*
BLSP-LE112840I25	112	62.5	4000 K	25.0	3595	PRE-ORDER*

\* Pre-order products will be available only with MOQ from 100 meters, lead time 4 – 5 weeks. For precise lead time, contact your Customer Service manager.

	METERS per REEL	REELS per BOX	LENGTH per BOX, M	WEIGHT per BOX, kg	
				56 Leds	112 Leds
5W	15	45	675	9.8	11.0
10 W	10	82	820	12.6	14.1
15 W	5	90	450	8.2	9.0
20 W	5	90	450	8.2	9.0
25 W	5	90	450	8.2	9.0

© 2020, All rights reserved BaltLED, UAB. Specifications are subject to change without notice.

www.baltled.com  
22<sup>nd</sup> May, 2020

Balt led