



# EDGE LIT LED BAR



## GENERAL SPECIFICATIONS

SUPPLY VOLTAGE	24 VDC
POWER, W	10 W   17 W   30 W
CRI	80
OPTICS	15x45°
RECOMMENDED DEPTH	100-250 mm
BINNING	3 SDCM
COLOUR / CCT	6500 K
OPERATING TEMPERATURE	-30 °C ~ +50 °C
STORAGE TEMPERATURE	+5 °C ~ +70 °C
CERTIFICATION	CE and RoHS compliant
IP CLASS	IP67   IP20
LIFETIME	L70 50,000 h
WARRANTY	5 years
MOUNTING OPTIONS	IP 67: u shape snap-in clicks IP 20: double-sided tape

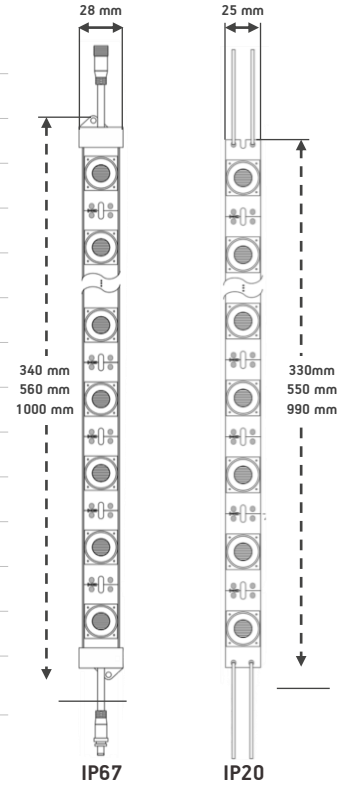

## ITEM DESCRIPTION

EdgeLit LED bars are specially designed for double-sided lightboxes with depth from 100 to 250 mm and height up to 3000 mm. Depending on the model, each EdgeLit bar has from 5 to 18 LEDs coupled with lens and mounted on the aluminum bar. Thanks to that, it takes much less time to install bars than regular LED modules. It is a perfect solution to achieve homogeneous and powerful illuminance of the diffusive surface.


## APPLICATION

- Double-sided light boxes
- Recommended depth: 100-250 mm

## FEATURES & BENEFITS

- IP67 protection class for outdoor and indoor applications
- IP20 protection class for indoor applications
- 6 mm aluminium base for good heat sinking (for IP67 bar)
- Easy and fast installation
- Long life-span of 50,000 h
- 5-years warranty

## LIGHT DISTRIBUTION GRAPH

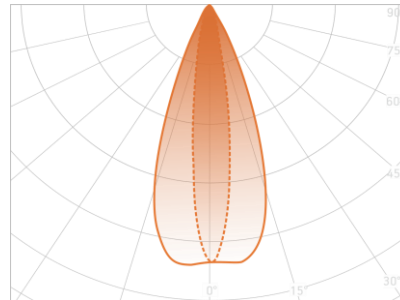

## ORDERING INFORMATION

SKU	IP CLASS	COLOUR	POWER, W	LUMEN OUTPUT, LM	DIMENSIONS, MM	STATUS
BLBP-340A15x4565E10	IP67	6500 K	10.0	750	340x28x26	PRE-ORDER*
BLBP-560A15x4565E17	IP67	6500 K	17.0	1275	560x28x26	PRE-ORDER*
BLBP-1000A15x4565E30	IP67	6500 K	30.0	2250	1000x28x26	PRE-ORDER*
BLBP-330A15x4565I10	IP20	6500 K	10.0	750	330x25x16	PRE-ORDER*
BLBP-550A15x4565I17	IP20	6500 K	17.0	1275	550x25x16	PRE-ORDER*
BLBP-990A15x4565I30	IP20	6500 K	30.0	2250	990x25x16	PRE-ORDER*
BLBP-CKIT	Additional connector kit					

\* Pre-order products will be available only with MOQ from 100 bars, lead time 3 – 4 weeks. For precise lead time, contact your Customer Service manager.

SKU	PCS. per BOX	WEIGHT per	
		BOX, kg	PCS, kg
BLBP-340A15x4565E10	120	17.4	0.120
BLBP-560A15x4565E17	80	19.5	0.206
BLBP-1000A15x4565E30	40	19.0	0.400
BLBP-330A15x4565I10	120	8.6	0.059
BLBP-550A15x4565I17	80	9.3	0.098
BLBP-990A15x4565I30	40	8.5	0.175

© 2020, All rights reserved BaltLED, UAB. Specifications are subject to change without notice.