

# SIGNBRIDGE PRO

100 W LED driver. Model: BPSE-100-12V.1



## FEATURES

- Metal housing design with functional ground
- Built-in active PFC function
- IP68 rating for indoor or outdoor installations
- Typical lifetime  $\geq 70,000$  hours
- 7 years warranty

## CONFORMITY & STANDARDS

EMC Emission:

- compliance to EN55015

EMC Immunity:

- EN55015
- EN61547
- EN61000-3-2
- EN61000-3-3
- CB
- ENEC
- CE-LVD:
  - IEC/EN61347-1,
  - IEC/EN61347-2-13,
  - UL8750
  - UL1310



Balt led


## GENERAL SPECIFICATIONS

EFFICIENCY	$\geq 88\%$ (230 VAC)
COLD START	3000 ms (230 VAC)
OPERATING CONDITIONS	$-40\text{ }^{\circ}\text{C} \sim +60\text{ }^{\circ}\text{C}$ ; 20 ~ 95% humidity
STORAGE CONDITIONS	$-40\text{ }^{\circ}\text{C} \sim +80\text{ }^{\circ}\text{C}$ ; 10 ~ 95% humidity
IP CLASS	IP68
PROTECTIONS INCLUDED	Over voltage Over current Short circuit Over temperature
WARRANTY	7 years, $\geq 70\,000$ h

## QUANTITY OF DRIVERS PER CIRCUIT BREAKER

CIRCUIT BREAKER OF TYPE C 16 A	CIRCUIT BREAKER OF TYPE C 25 A
3 units (230 VAC)	8 units (230 VAC)

## DIMENSIONS (MM)

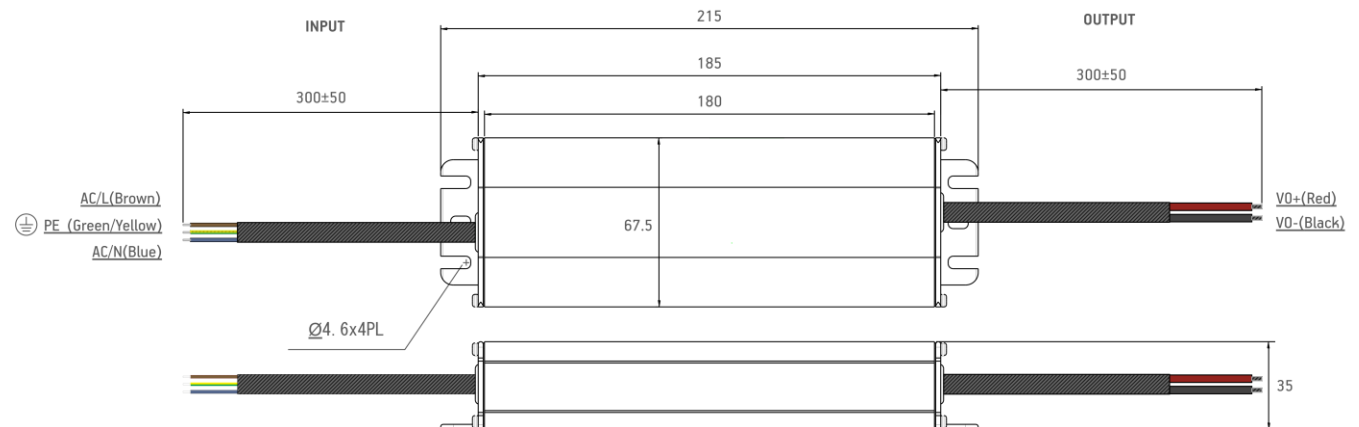

## INPUT

INPUT VOLTAGE RANGE	200 – 240 Vac; 50 – 60 Hz
MAX INPUT AC CURRENT	0.8 A Max
MAX INRUSH CURRENT	$\leq 80$ A
POWER FACTOR	$\geq 0.95$ (230 VAC)

## OUTPUT

OUTPUT CURRENT	8.33 A
OUTPUT VOLTAGE	12 V
OUTPUT POWER	100 W

## ORDERING INFORMATION

SKU	UNIT NET WEIGHT, G	UNIT DIMENSIONS (LxWxH), MM	STATUS
BPSE-100-12V.1	880.0	180 x 67.5 x 35	PRE-ORDER*

\* For pre-order products MOQ and precise lead time, contact your country manager.