

LINELIT STRIP



ITEM DESCRIPTION

Flexible LED strips with 56 or 112 new generation LEDs reaching up to 160 lm/w efficacy. Comes with double-sided tape for easy peel and use; low temperature on metal profiles and popular power range from 5 to 25 watts per meter. Made from high-quality electronic components ensuring long lifetime up to 75 000 h (L80) with 5 years warranty. Perfect for aluminium profiles, side lighting, signs, general lighting, office lighting.

APPLICATION


- Aluminium profiles
- Side lighting
- Signs
- General lighting
- Office lighting

FEATURES & BENEFITS


- 5-years warranty
- Durable thermal conductive double-sided adhesive tape
- Compact 10/12 mm width
- Low temperatures on metal profiles

GENERAL SPECIFICATIONS


SUPPLY VOLTAGE	24 VDC
WATTS PER METER	5 W 10 W 15 W 20 W 25 W
CRI	80
LEDs PER METER	56 112
CUTTING STEP	125 mm 62.5 mm
STRIP WIDTH	10 mm (IP20) 12 mm (IP67)
BINNING	3 SDCM
COLOUR / CCT	3000 K 4000 K 6500 K
OPERATING TEMPERATURE	-20 °C ~ +60 °C
STORAGE TEMPERATURE	+5 °C ~ +70 °C
CERTIFICATION	CE and RoHS compliant
IP CLASS	IP 20 IP 67
LIFETIME	L80 75,000 h
WARRANTY	5 years
MOUNTING OPTIONS	double-sided tape

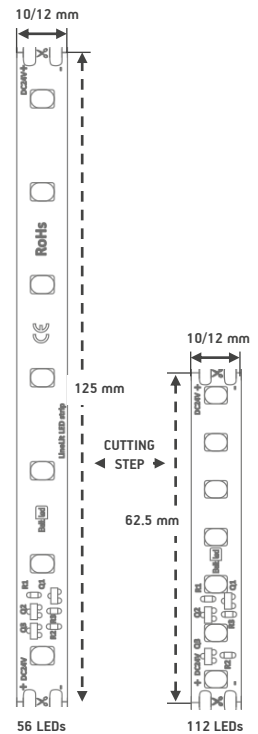


DIMENSIONS, MM

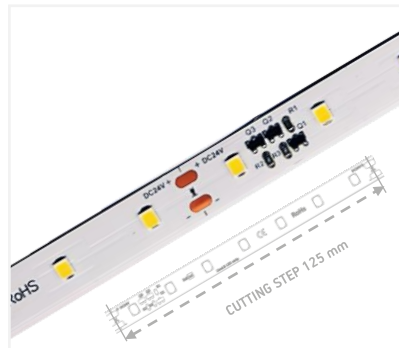

IP 20 | 56 LEDs

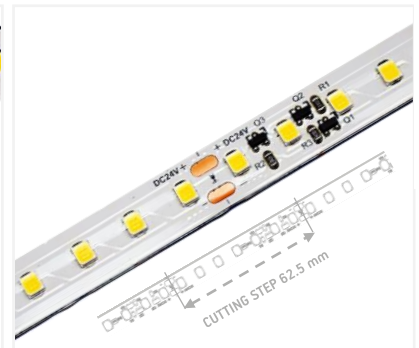

IP 20 | 112 LEDs

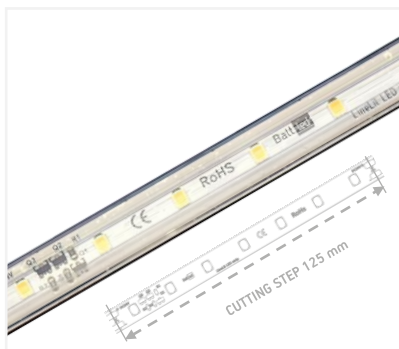

IP 67 | 56 LEDs



IP 67 | 112 LEDs

ORDERING INFORMATION

5 YEARS WARRANTY

IP20
IP67

RoHS
Compliant

CE



SKU	IP CLASS	CRI	LEDs per METER	CUTTING STEP, MM	COLOUR	POWER per METER, W	LUMEN OUTPUT, LM	STATUS
BLSP-LE56830I5	IP 20	80	56	125	3000 K	5.0	638	PRE-ORDER*
BLSP-LE56830I10	IP 20	80	56	125	3000 K	10.0	1284	PRE-ORDER*
BLSP-LE56830I15	IP 20	80	56	125	3000 K	15.0	1842	PRE-ORDER*
BLSP-LE56830I20	IP 20	80	56	125	3000 K	20.0	2607	PRE-ORDER*
BLSP-LE56830I25	IP 20	80	56	125	3000 K	25.0	3062	PRE-ORDER*
BLSP-LE56840I5	IP 20	80	56	125	4000 K	5.0	717	PRE-ORDER*
BLSP-LE56840I10	IP 20	80	56	125	4000 K	10.0	1443	PRE-ORDER*
BLSP-LE56840I15	IP 20	80	56	125	4000 K	15.0	2070	PRE-ORDER*
BLSP-LE56840I20	IP 20	80	56	125	4000 K	20.0	2929	PRE-ORDER*
BLSP-LE56840I25	IP 20	80	56	125	4000 K	25.0	3440	PRE-ORDER*
BLSP-LE56865I5	IP 20	80	56	125	6500 K	5.0	674	PRE-ORDER*
BLSP-LE56865I10	IP 20	80	56	125	6500 K	10.0	1356	PRE-ORDER*
BLSP-LE56865I15	IP 20	80	56	125	6500 K	15.0	1946	PRE-ORDER*
BLSP-LE56865I20	IP 20	80	56	125	6500 K	20.0	2753	PRE-ORDER*
BLSP-LE56865I25	IP 20	80	56	125	6500 K	25.0	3234	PRE-ORDER*
BLSP-LE112830I5	IP 20	80	112	62.5	3000 K	5.0	712	PRE-ORDER*
BLSP-LE112830I10	IP 20	80	112	62.5	3000 K	10.0	1348	PRE-ORDER*
BLSP-LE112830I15	IP 20	80	112	62.5	3000 K	15.0	2027	PRE-ORDER*
BLSP-LE112830I20	IP 20	80	112	62.5	3000 K	20.0	2623	PRE-ORDER*
BLSP-LE112830I25	IP 20	80	112	62.5	3000 K	25.0	3200	PRE-ORDER*
BLSP-LE112840I5	IP 20	80	112	62.5	4000 K	5.0	800	PRE-ORDER*
BLSP-LE112840I10	IP 20	80	112	62.5	4000 K	10.0	1515	PRE-ORDER*
BLSP-LE112840I15	IP 20	80	112	62.5	4000 K	15.0	2278	PRE-ORDER*
BLSP-LE112840I20	IP 20	80	112	62.5	4000 K	20.0	2948	PRE-ORDER*
BLSP-LE112840I25	IP 20	80	112	62.5	4000 K	25.0	3595	PRE-ORDER*
BLSP-LE112865I5	IP 20	80	112	62.5	6500 K	5.0	752	PRE-ORDER*
BLSP-LE112865I10	IP 20	80	112	62.5	6500 K	10.0	1424	PRE-ORDER*
BLSP-LE112865I15	IP 20	80	112	62.5	6500 K	15.0	2141	PRE-ORDER*
BLSP-LE112865I20	IP 20	80	112	62.5	6500 K	20.0	2771	PRE-ORDER*
BLSP-LE112865I25	IP 20	80	112	62.5	6500 K	25.0	3379	PRE-ORDER*
BLSP-LE56830E5	IP 67	80	56	125	3000 K	5.0	589	PRE-ORDER*
BLSP-LE56830E10	IP 67	80	56	125	3000 K	10.0	1210	PRE-ORDER*
BLSP-LE56830E15	IP 67	80	56	125	3000 K	15.0	1910	PRE-ORDER*
BLSP-LE56840E5	IP 67	80	56	125	4000 K	5.0	662	PRE-ORDER*
BLSP-LE56840E10	IP 67	80	56	125	4000 K	10.0	1360	PRE-ORDER*
BLSP-LE56840E15	IP 67	80	56	125	4000 K	15.0	2060	PRE-ORDER*
BLSP-LE56865E5	IP 67	80	56	125	6500 K	5.0	623	PRE-ORDER*
BLSP-LE56865E10	IP 67	80	56	125	6500 K	10.0	1278	PRE-ORDER*
BLSP-LE56865E15	IP 67	80	56	125	6500 K	15.0	1978	PRE-ORDER*
BLSP-LE112830E5	IP 67	80	112	62.5	3000 K	5.0	642	PRE-ORDER*
BLSP-LE112830E10	IP 67	80	112	62.5	3000 K	10.0	1237	PRE-ORDER*
BLSP-LE112830E15	IP 67	80	112	62.5	3000 K	15.0	1937	PRE-ORDER*
BLSP-LE112840E5	IP 67	80	112	62.5	4000 K	5.0	722	PRE-ORDER*
BLSP-LE112840E10	IP 67	80	112	62.5	4000 K	10.0	1390	PRE-ORDER*
BLSP-LE112840E15	IP 67	80	112	62.5	4000 K	15.0	2090	PRE-ORDER*
BLSP-LE112865E5	IP 67	80	112	62.5	6500 K	5.0	679	PRE-ORDER*
BLSP-LE112865E10	IP 67	80	112	62.5	6500 K	10.0	1307	PRE-ORDER*
BLSP-LE112865E15	IP 67	80	112	62.5	6500 K	15.0	2007	PRE-ORDER*

* Pre-order products will be available only with MOQ from 100 meters, lead time 4 – 5 weeks. For precise lead time, contact your Customer Service manager.

	METERS per REEL	REELS per BOX	LENGTH per BOX, M	WEIGHT per BOX, kg		
				56 Leds	112 Leds	
IP20	5W	15	45	675	9.8	11.0
	10 W	10	82	820	12.6	14.1
	15 W	5	90	450	8.2	9.0
	20 W	5	90	450	8.2	9.0
	25 W	5	90	450	8.2	9.0
IP67	5W	5	20	100	9.7	9.7
	10 W	5	20	100	9.7	9.7
	15 W	5	20	100	9.7	9.7

© 2020, All rights reserved BaltLED, UAB. Specifications are subject to change without notice.